

**DIGI®**

Searching for a New Balance

# SM-100 Series Scale Printer

RETAIL PRODUCTS

- State of the art communications with TCP/IP built in!
- Flexible label formatting with full graphic capability. Image printed on label with .bmp files
- Simple and quick changing between labels using the removable cassette
- Capable of full ingredients and cooking instructions
- Meets Canadian nutritional label requirements

**SM-100 BCS****THE DIGI SM-100 BCS PLUS**

The SM-100 is ready for today's needs and tomorrow. Fully capable of ingredients and nutrifacts the scale will grow with you.

PACKED ON  
06-JN-29

BEST BEFORE  
06-JL-04

UNIT PRICE  
\$1.00/kg

NET WEIGHT  
5.000 kg

| Nutrition Facts<br>Valeur nutritive                |                                       |
|----------------------------------------------------|---------------------------------------|
| Per 125 mL (87 g)<br>Pour 125 mL (87 g)            |                                       |
| Amount<br>Teneur                                   | % Daily Value<br>% valeur quotidienne |
| Calories / Calories                                | 80                                    |
| Fat / Lipides 0.5 g                                | 1%                                    |
| Saturated / saturés 0.0 g<br>+ Trans / trans 0.0 g | 0%                                    |
| Cholesterol / Cholestérol                          | 0 mg                                  |
| Sodium / Sodium                                    | 0 mg                                  |
| Carbohydrate / Glucides                            | 18 g                                  |
| Fibre / Fibres                                     | 2 g                                   |
| Sugars / Sucres                                    | 2 g                                   |
| Protein / Protéines                                | 3.0 g                                 |
| Vitamin A / Vitamine A                             | 2%                                    |
| Vitamin C / Vitamine C                             | 10%                                   |
| Calcium / Calcium                                  | 10%                                   |
| Iron / Fer                                         | 2%                                    |

000001



0 212345 105001

**Total Price**  
**\$5.00**

**DIGI CANADA INC****SM-100 HS****SM-100 PCS**

Thank you to our loyal customers for their continued support



# SM-100 Series Scale Printer

*The Preferred Choice for Service Scale Printer*

## Specifications


|                              |                                                                                                                                          |                                                                  |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| <b>model</b>                 | <b>SM-100 PCS</b> (Pole Type)<br><b>SM-100 BCS</b> (Bench Type)<br><b>SM-100 HS</b> (Hanging Type)                                       |                                                                  |
| <b>Capacity</b>              | 6 Kg (1 - 2 g increment)<br>15 Kg (2 - 5 g increment)<br>30 Kg (10g increment)<br>30 lb (.01lb increment)                                |                                                                  |
| <b>Memory capacity</b>       | 2 MB (standard)                                                                                                                          |                                                                  |
| <b>Display Resolution</b>    | 1 / 3,000 (dual range)                                                                                                                   |                                                                  |
| <b>Display</b>               | <b>All types - Operator:</b> 32 x 202 full dot matrix green LCD display<br><b>- Customer:</b> 32 x 202 full dot matrix green LCD display |                                                                  |
|                              | <b>Tare Weight:</b>                                                                                                                      | 4 Digits                                                         |
|                              | <b>Weight:</b>                                                                                                                           | 5 Digits                                                         |
|                              | <b>Unit Price:</b>                                                                                                                       | 6 Digits                                                         |
|                              | <b>Total Price:</b>                                                                                                                      | 7 Digits                                                         |
| <b>Printing</b>              | <b>Paper Width:</b>                                                                                                                      | Maximum 60 mm (label) - 56 mm printable<br>40 or 60 mm (receipt) |
|                              | <b>Speed:</b>                                                                                                                            | 80 mm / second (label)<br>105 mm / second (receipt)              |
|                              | <b>Label Size:</b>                                                                                                                       | Length: 28 - 220mm<br>Width: 30 - 56mm                           |
| <b>Power Source</b>          | AC 110 / Volts (50 / 60 Hz)                                                                                                              |                                                                  |
| <b>Operating Temperature</b> | -10 °C to +40 °C                                                                                                                         |                                                                  |
| <b>Humidity</b>              | 15 % to 85 % RH                                                                                                                          |                                                                  |
| <b>Interface</b>             | Standard: Ethernet                                                                                                                       |                                                                  |

RETAIL PRODUCTS

### SM-100 PCS

### SM-100 BCS

### SM-100 HS

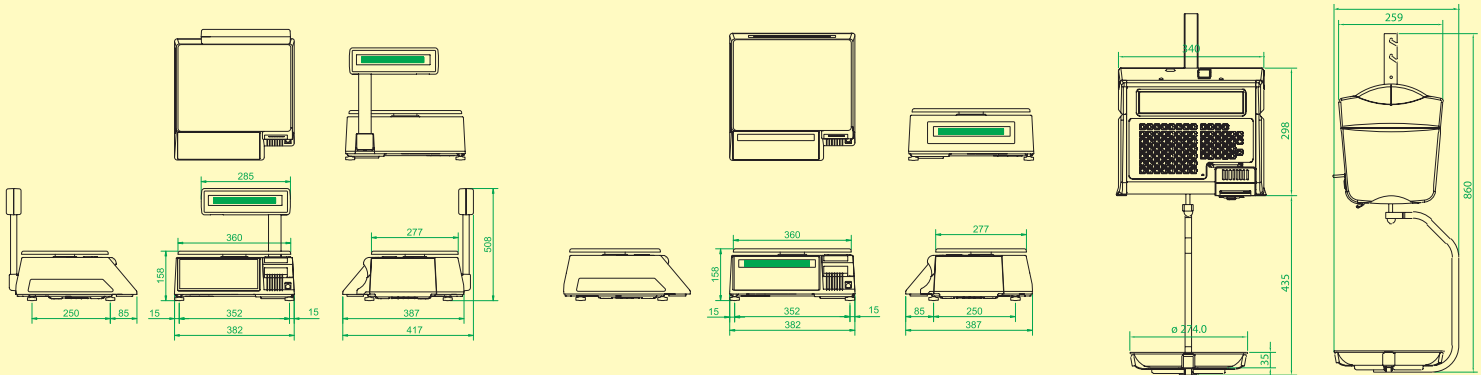

Thank you to our loyal customers for their continued support